

technical information - wall mounted fires

wall mounted radiance information

| Product Code | Frame | Finish | Overall Size (mm) | | | Flame Viewing Area (w x h) | Heat Output | Efficiency |
|----------------------|-------|--------------|-------------------|-------------|------------|----------------------------|-------------|------------|
| | | | w | h | d* | | | |
| RADIANCE 80W | | | | | | | | |
| 219-003 | Glass | Black Glass | 1280 | 670 | 160 | 800 x 280 | 1 - 2kW | 99% |
| 219-014 | Glass | White Glass | 1280 | 670 | 160 | 800 x 280 | 1 - 2kW | 99% |
| 219-261 | Steel | Graphite | 1280 | 670 | 175 | 800 x 280 | 1 - 2kW | 99% |
| 219-261RD | Steel | Metallic Red | 1280 | 670 | 175 | 800 x 280 | 1 - 2kW | 99% |
| 219-261IV | Steel | Ivory | 1280 | 670 | 175 | 800 x 280 | 1 - 2kW | 99% |
| RADIANCE 100W | | | | | | | | |
| 219-019 | Glass | Black Glass | 1480 | 670 | 160 | 1000 x 280 | 1 - 2kW | 99% |
| 219-027 | Glass | White Glass | 1480 | 670 | 160 | 1000 x 280 | 1 - 2kW | 99% |
| 219-274 | Steel | Graphite | 1480 | 670 <td 175 | 1000 x 280 | 1 - 2kW | 99% | |
| 219-274RD | Steel | Metallic Red | 1480 | 670 | 175 | 1000 x 280 | 1 - 2kW | 99% |
| 219-274IV | Steel | Ivory | 1480 | 670 | 175 | 1000 x 280 | 1 - 2kW | 99% |
| RADIANCE 150W | | | | | | | | |
| 219-033 | Glass | Black Glass | 1980 | 670 | 160 | 1500 x 280 | 1 - 2kW | 99% |
| 219-056 | Glass | White Glass | 1980 | 670 | 160 | 1500 x 280 | 1 - 2kW | 99% |
| 219-286 | Steel | Graphite | 1980 | 670 | 175 | 1500 x 280 | 1 - 2kW | 99% |
| 219-286RD | Steel | Metallic Red | 1980 | 670 | 175 | 1500 x 280 | 1 - 2kW | 99% |
| 219-286IV | Steel | Ivory | 1980 | 670 | 175 | 1500 x 280 | 1 - 2kW | 99% |
| RADIANCE 190W | | | | | | | | |
| 219-060 | Glass | Black Glass | 2380 | 670 | 160 | 1900 x 280 | 1 - 2kW | 99% |
| 219-084 | Glass | White Glass | 2380 | 670 | 160 | 1900 x 280 | 1 - 2kW | 99% |
| 219-293 | Steel | Graphite | 2380 | 670 | 175 | 1900 x 280 | 1 - 2kW | 99% |
| 219-293RD | Steel | Metallic Red | 2380 | 670 | 175 | 1900 x 280 | 1 - 2kW | 99% |
| 219-293IV | Steel | Ivory | 2380 | 670 | 175 | 1900 x 280 | 1 - 2kW | 99% |


*Depth of overall installation including 10mm deep wall mounting bracket.

radiance optional fuel effects and accessories

| Fuel Effect | Product Codes | | | | Product Code | Description |
|---------------------|---------------|---------|---------|---------|-------------------------------------|-------------|
| | 80W | 100W | 150W | 190W | | |
| Clear Crushed Glass | 919-008 | 919-021 | 919-021 | 919-034 | 919-802 Radiance Semi-Recess Kit | |
| Black Glass Beads | 923-788 | 923-788 | 923-788 | 923-735 | | |
| Clear Glass Beads | 923-774 | 923-774 | 923-774 | 923-797 | | |
| | | | | | | |

For a more minimalist installation, an optional semi-recess kit is available for reducing the depth of the wall mounted Radiance by recessing it in a pre-constructed 90mm cavity.

fire dimensions - wall mounted radiance

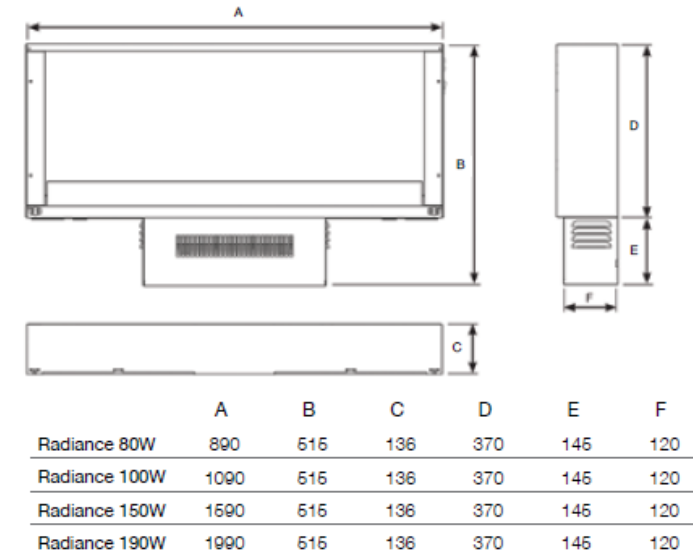

All dimensions in mm

frame dimensions - wall mounted radiance

